





POWER 76 HC


POWER 76 HC






 **DESCRIZIONE**
Portata massima 100 kg.
Inclinazione manuale e foro passante con diam. 50 mm.

 **DESCRIPTION**
Maximum load 100 kg.
Manual tilt and 50 mm diam. hollow center.

 **BESCHREIBUNG**
Maximale Tragfähigkeit 100 kg.
Manuelle Kippung und Hohlwelle mit 50 mm Durchmesser.

 **DESCRIPTION**
Portée max 100 kg.
Inclinaison manuelle et trou centrale diam. 50 mm.

 **DESCRIPCIÓN**
Capacidad maxima 100 kg, inclinación manual
y agujero de paso diám. 50 mm.

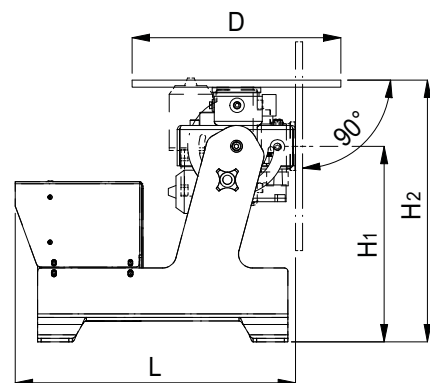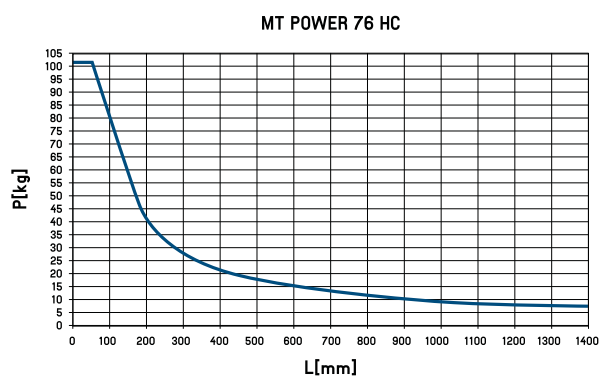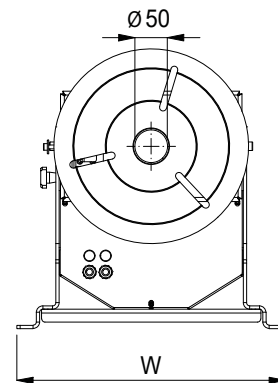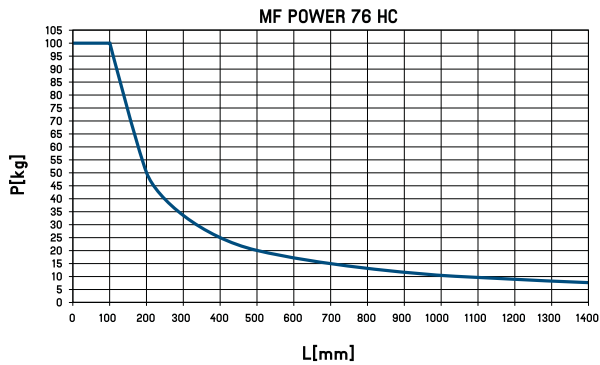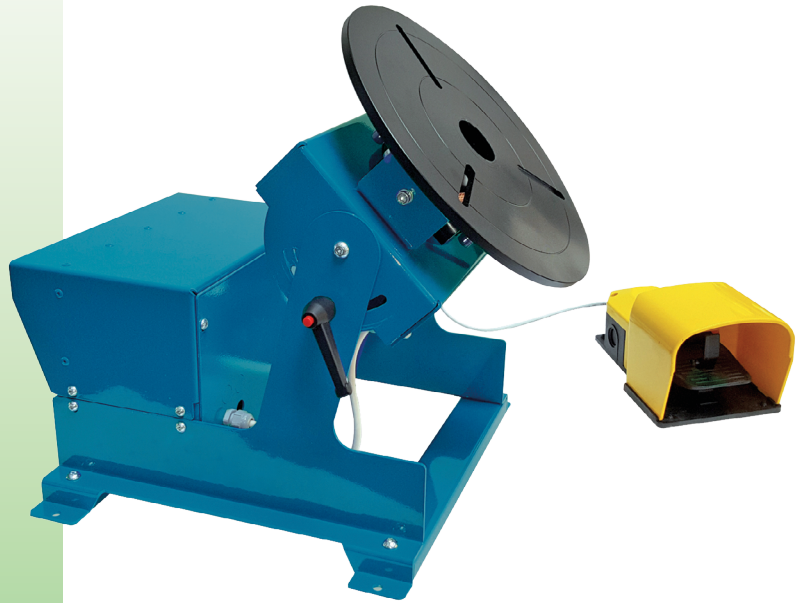

Tipo motore	L mm	W mm	H1 mm	H2 mm	D mm	volt	rpm	Portata / Load / Portee / Tragkraft / Capacidad		kg
								Horizontal kg	Vertical kg	
DC	450	414	281	378	300	220	0,6-6	100	50	26