

SPS 150 HC 200

SPS 150 HC 200



DESCRIZIONE

Portata massima 150 kg.
Inclinazione manuale e foro passante con diam. 200 mm.
Rotazione con motore in corrente alternata, con inverter.



DESCRIPTION

Maximum load 150 kg.
Manual tilt and 200 mm diam. hollow center.
Slewing by AC motor with inverter.



BESCHREIBUNG

Maximale Tragfähigkeit 150 kg.
Manuelle Kippung und Hohlwelle mit 200 mm Durchmesser.
Schwenken durch Wechselstrommotor mit Wechselrichter.









DESCRIPTION

Portée max 150 kg.
Inclinaison manuelle et trou centrale diam. 200 mm.
Rotation avec moteur à courante alternée avec inverter.



DESCRIPCIÓN

Capacidad maxima 150 kg,
inclinación manual y agujero de paso diám. 200 mm.
Rotación por motor de corriente alterna con inverter.

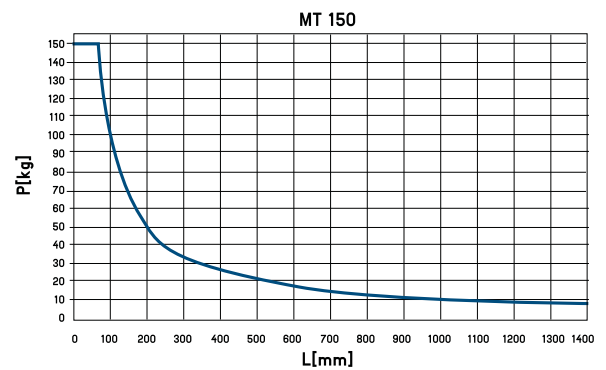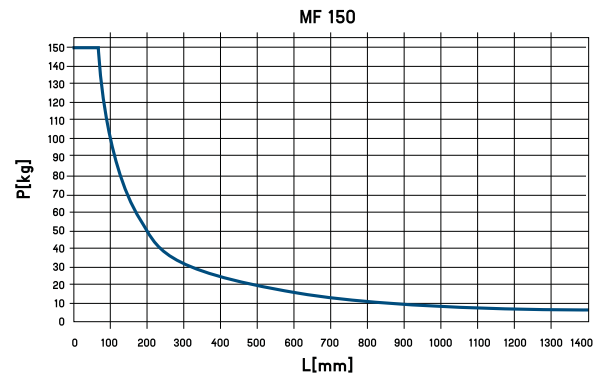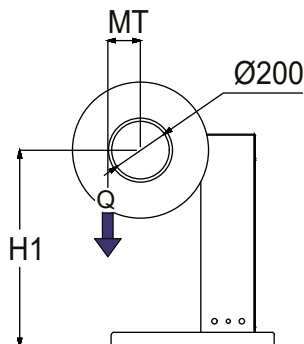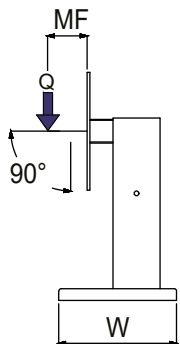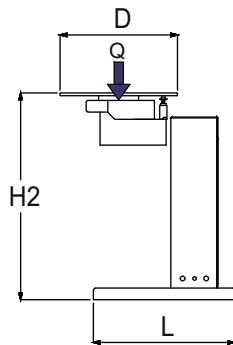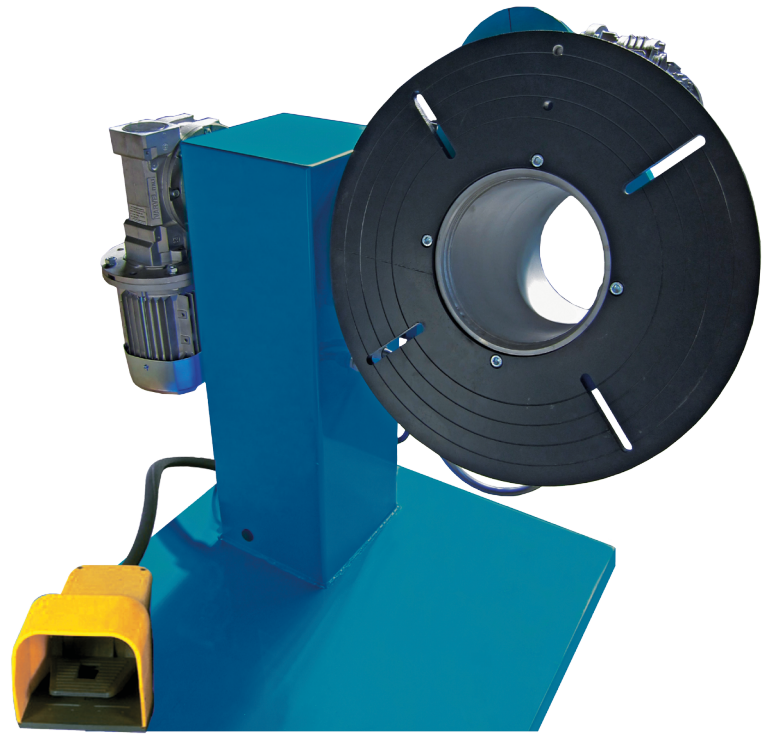

Tipo motore	Q kg	MT danm	MF danm	D mm	H1 mm	H2 mm	L mm	W mm	rpm	volt	volt	volt	kg
AC	150	10	10	550	730	910	700	700	0,9-9	1x220	24	220	150