

# SPS 150 HC



## DESCRIZIONE

Portata massima 150 kg.  
Inclinazione manuale e foro passante con diam. 100 mm.  
Rotazione con motore in corrente alternata, con inverter.



## DESCRIPTION

Maximum load 150 kg.  
Manual tilt and 100 mm diam. hollow center.  
Slewing by AC motor with inverter.



## BESCHREIBUNG

Maximale Tragfähigkeit 150 kg.  
Manuelle Kippung und Hohlwelle mit 100 mm Durchmesser.  
Schwenken durch Wechselstrommotor mit Wechselrichter.








## DESCRIPTION

Portée max 100 kg.  
Inclinaison manuelle et trou centrale diam. 50 mm.  
Rotation avec moteur à courant alternatif avec inverter.



## DESCRIPCIÓN

Capacidad máxima 100 kg, inclinación manual y agujero de paso diám. 50 mm.  
Rotación por motor de corriente alterna con inverter.

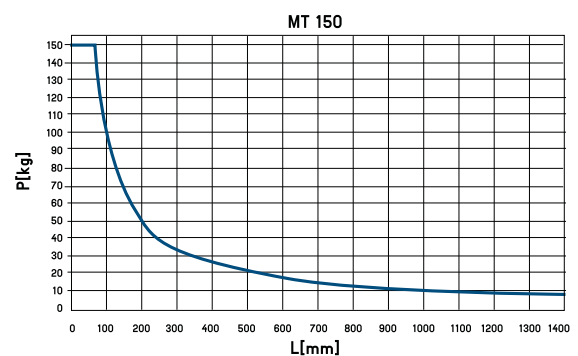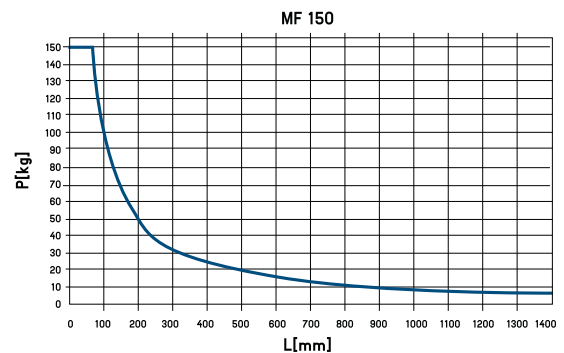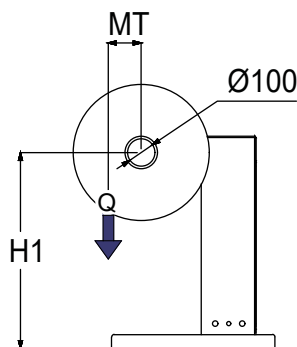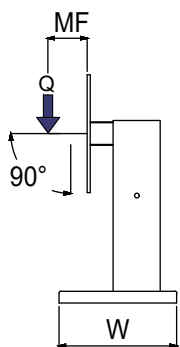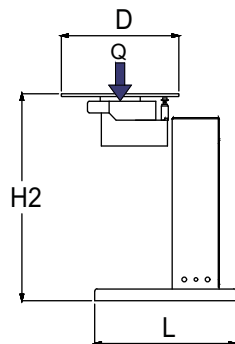

Tipo motore	Q kg	MT danm	MF danm	D mm	H1 mm	H2 mm	L mm	W mm	rpm	volt	volt	volt	kg
AC	150	10	10	500	730	910	700	700	0,9-9	1x220	24	220	132