





# SPS 75 HC


SPS 75 HC






 **DESCRIZIONE**  
Portata massima 70 kg.  
Inclinazione manuale e foro passante diam. 100 mm.  
Rotazione con motore in corrente alternata, con inverter.

 **DESCRIPTION**  
Maximum load 70 kg.  
Manual tilt and 100 mm diam. hollow center.  
Slewing by AC motor with inverter.

 **BESCHREIBUNG**  
Maximale Tragfähigkeit 70 kg.  
Kippung manuell und Hohlwelle mit 100 mm Durchmesser.  
Schwenken durch Wechselstrommotor mit Wechselrichter.

 **DESCRIPTION**  
Portée max 70 kg.  
Inclinaison manuelle et trou centrale diam. 100 mm.  
Rotation avec moteur à courante alternée avec inverter.

 **DESCRIPCIÓN**  
Capacidad máxima 70 kg.  
Inclinación manual y agujero de paso diam. 100 mm.  
Rotación por motor de corriente alterna con inverter.

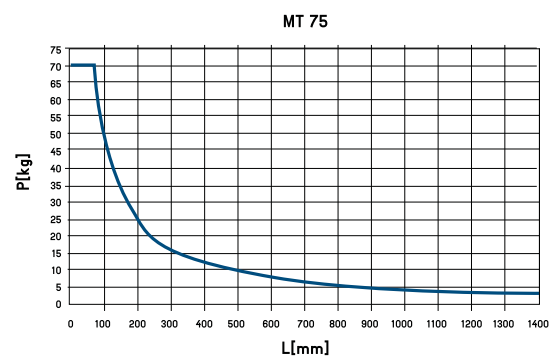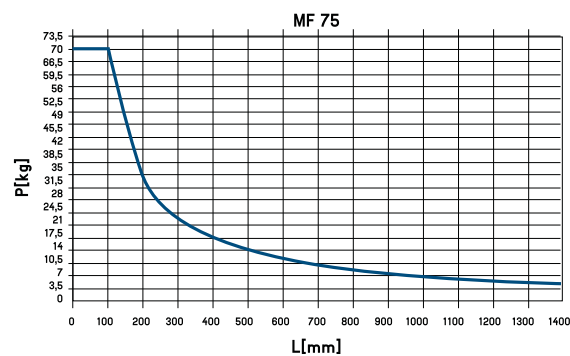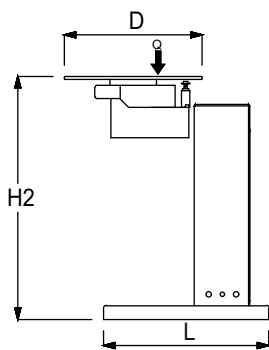

Tipo motore	Q kg	MT danm	MF danm	D mm	H1 mm	H2 mm	L mm	W mm	rpm	volt	volt	volt	kg
AC	70	5	7	500	710	910	500	600	1-10	1x220	24	220	105