

SPS 150 HC






DESCRIZIONE
 Portata massima 150 kg.
 Inclinazione manuale e foro passante con diam. 100 mm.
 Rotazione con motore in corrente alternata, con inverter.

DESCRIPTION
 Maximum load 150 kg.
 Manual tilt and 100 mm diam. hollow center.
 Slewing by AC motor with inverter.

DESCRIPTION
 Portée max 100 kg.
 Inclinaison manuelle et trou centrale diam. 50 mm.
 Rotation avec moteur à courante alternée avec inverter.

BESCHREIBUNG
 Maximale Tragfähigkeit 150 kg.
 Manuelle Kippung und Hohlwelle mit 100 mm Durchmesser.
 Schwenken durch Wechselstrommotor mit Wechselrichter.

DESCRIPCIÓN
 Capacidad máxima 100 kg, inclinación manual y agujero de paso diám. 50 mm.
 Rotación por motor de corriente alterna con inverter.

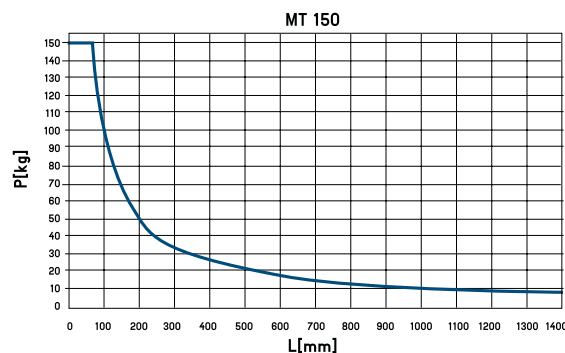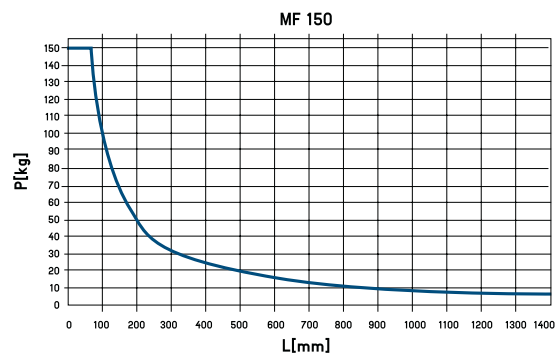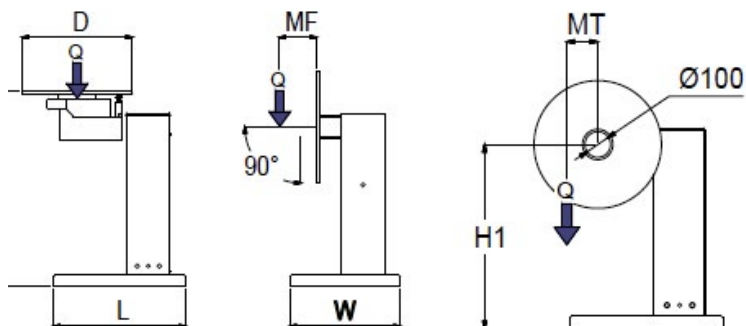

TIPO MOTORE	Q KG	MT DAMN	MF DAMN	D MM	H1 MM	H2 mm	L mm	W mm	rpm	Power supply - volt	kg
AC	150	10	10	500	730	910	700	700	0,9-9	1 PH - 230	132